



WINTERGLOED BV

TECHNICAL SPECIFICATION SHEET OT 65 mm

ED 0 DEL 10.08.2021 - REV 4 DEL 02.01.2023

Material type :



- **Weight:** 7.8g +/- 0.3
- **Material type:** TFS-E2,8/2,8
- **Material thickness:** 0.18 mm
- **Hardness:** TH 520
- **Compound:** WATER BASED
- **Interior lining:** WHITE LAQUER 5.5 gr.mq +/-0.5
or Paint 5.5 gr. mq +/- 0.5
Epossidic gold 5.5 gr.mq +/- 0.5
- **External coating:**
- **Weight of the composite film:** 57 ± 5 mg

Dimension:

- **Curl height CH:** 2.05 ± 0.1 mm
- **Countersink depth CD:** 3.55 ± 0.02 mm
- **Outside curl diameter OCD:** 72.9 ± 0.20 mm
- **Inside curl diameter ICD:** $\varnothing P=64.25 \pm 0.01$ mm $\varnothing NP=64.32 \pm 0.01$ mm

Mechanical performance:

- **Burst pressure:** 2.00 Min. bar

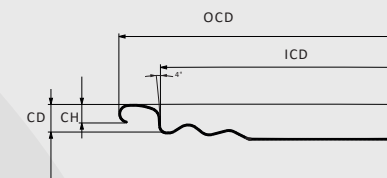

Pallet dim.(LxWxH):	1420x1120x1280 (mm)
Pallet tipe:	WOOD
Sleeve type:	Plastic sleeve with interleave
Number of ends per sleeve:	270
Number of sleeve per pallet:	544
Number of ends per pallet:	146880
Pallet weight:	1320 Kg

Individual deliveries may have different nominal characteristics. The characteristics of the materials are always uniform for all batches of individual supplies. Other nominal values can be considered subject to prior agreement. Higher coverage than the contracted one is always allowed.