



WINTERGLOED BV

# TECHNICAL SPECIFICATION SHEET OT 73 mm

ED 0 DEL 10.08.2021 - REV 4 DEL 02.01.2023

## Material type :


- **Weight:** 7.8g +/- 0.3
- **Material type:** TFS-E2,8/2,8
- **Material thickness:** 0.18 mm
- **Hardness:** TH 520
- **Compound:** WATER BASED
- **Interior lining:** WHITE LAQUER 5.5 gr.mq +/-0.5  
or Paint 5.5 gr. mq +/- 0.5
- **External coating:** Epossidic gold 5.5 gr.mq +/- 0.5
- **Weight of the composite film:** 57 ± 5 mg

## Dimension:

- **Curl height CH:** 2.00 ± 0.10 mm
- **Countersink depth CD:** 2.95 ± 0.10 mm
- **Outside curl diameter OCD:** 82.00 ± 0.10 mm
- **Inside curl diameter ICD:** 72.51 ± 0.10 mm

## Mechanical performance:

- **Burst pressure:** 2.00 Min. bar

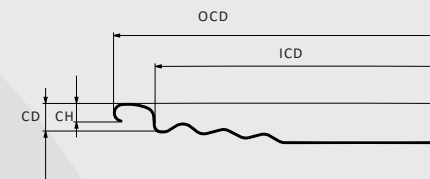

<b>Pallet dim.(LxWxH):</b>	1420x1120x1280 ( mm )
<b>Pallet tipe:</b>	WOOD
<b>Sleeve type:</b>	Plastic sleeve with interleave
<b>Number of ends per sleeve:</b>	270
<b>Number of sleeve per pallet:</b>	544
<b>Number of ends per pallet:</b>	146880
<b>Pallet weight:</b>	1320 Kg

Individual deliveries may have different nominal characteristics. The characteristics of the materials are always uniform for all batches of individual supplies. Other nominal values can be considered subject to prior agreement. Higher coverage than the contracted one is always allowed.